

Yealink PoE Adapter YLPOE30

Yealink YLPOE30, a power supply for Yealink CP960 IP conference phone and other Yealink PoE-featured IP phones, is designed to provide both data connection and electric power with only one Ethernet cable, giving you a clean and tidy desktop. It is standardized by IEEE802.3af and IEEE802.3at and is plug-and-play without any extra deployment.



Specifications

- > Standard: IEEE802.3af, IEEE802.3at
- > Interface: 10/100/1000M PoE ports
- > LED indicators: PWR, PoE
- > Input: 100~240V AC 50/60Hz 1.0A
- > Output: 54V 0.56A
- > PIN definition: 1/2(+), 3/6(-)
- > Operating temperature: 0°C~40°C (32°F~104°F)
- > Storage temperature: -40°C~70°C (-40°F~158°F)
- > Operating humidity: 10%~90%, non-condensing
- > Storage humidity: 5%~90%, non-condensing

Compatibility

Yealink YLPOE30 is perfectly compatible with Yealink CP960 IP conference phone, and other Yealink IP phones which support PoE feature are also compatible.

Package Features


- > Package content:
 - PSE
 - Ethernet Cable (2m CAT5E FTP cable)
 - Power Cord
- > Qty/CTN: 20 PCS
- > N.W/CTN: 10.4 kg
- > G.W/CTN: 11.4 kg
- > Carton meas: 120mm*180mm*105mm
- > Giftbox size: 545mm*255mm*380mm

Compliance

IC, BC



Connection:

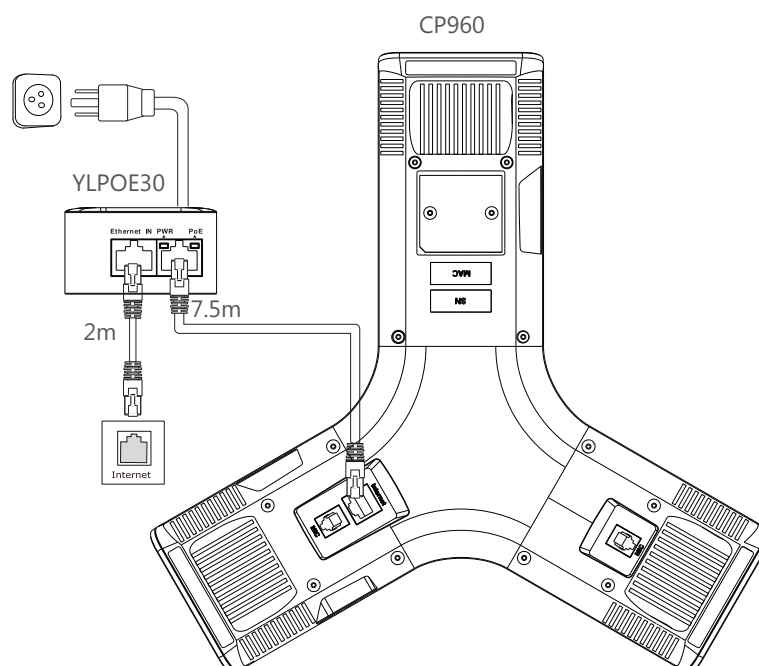

Digitel Europe Ltd

Communications Centre, 1 Ivy Street, Priory Industrial Estate, Birkenhead, Wirral CH41 5EE

Tel: 0151 650 0065 ♦ Fax: 0151 650 1162 ♦ Web: www.digitaleurope.co.uk ♦ Mail: mail@digitaleurope.co.uk